


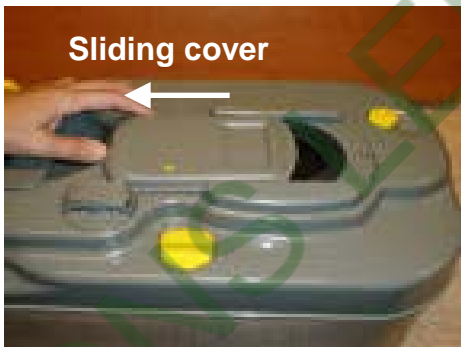
Repair instruction

Description: C2 C3 C4 C200 Blade
Part number: 23847
 Look for Service Centers, Point of Sale addresses and other information on: www.thetford-europe.com

Version:	V2
Date:	13/06/2006
Tools required:	

A


Remove the sliding cover.



Remove the 2 screw covers (only C200 toilets). **Note:** Lever off gently.

B


Unscrew the 8 screws on the seal cover.

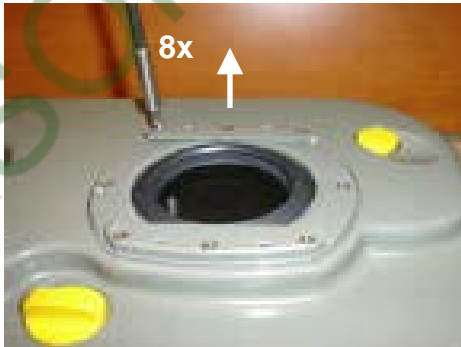

Take the seal cover off.

C

General mechanism info: do **NOT** remove the blade arm when changing the blade.

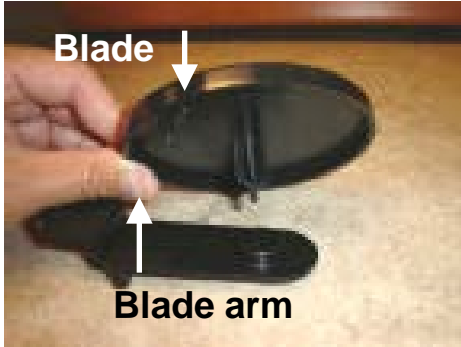

Pull the blade gently out of the blade arm. **Note:** the blade is pressed into the blade arm.

D

Push the blade arm a little bit up.



Press the new blade gently in the hole of the blade arm.

E

Open and close the blade a few times, to ensure a good operation of the mechanism.

When placing the lip seal on the waste tank, the thinner flange has to face downwards the blade.

**F**

Place the lip seal on the waste tank.

Screw the seal cover back onto the waste tank.

**G**

Press both screw covers back on the seal cover (only C200 toilets).

Place sliding cover back on its place. Make sure that the two arrows are pointed to each other.

