

NEW On Board Water Pump

Delivers smooth consistent flow and runs dry without damage



8 Litre Model. Vertically fitted

PERFORMANCE

- Quiet Operation
- Automatic Operation - Plug 'n' Play
- Easy Installation - Quick Connect Plumbing



Lightweight
20% lighter*



12 Litre Model. Horizontally fitted

POWER

- High flow rates at a variety of outlets
 - Smooth Constant Flow
- Self Priming Up To 3m (10ft)

PLUS


PROTECTION

- Fully Sealed Protective Motor Housing
 - Completely Integrated Electronics
 - Runs Dry Without Damage
- Includes strainer to protect pump from debris


*Compared to a Whale® Smartflo based on tests carried out in the Whale® Laboratory, information is correct on Sept 2012.




Product Code	FP0814B	FW1214B	FW1215B
Mounting Orientation	Vertical Mount	Horizontal Mount	
Open Flow Rate (per min)	8 ltr (2.0 US GPM)	12 ltrs (3.0 US GPM)	
Voltage	12 V d.c.		
Max. System Pressure	2 bar (30psi)		3 bar (45psi)
Hose Connections	Whale® Quick Connect 12mm Female Connections	Whale® Quick Connect 15mm Female Connections	
NOTE: REDUCERS/ADAPTORS AVAILABLE FOR DIFFERENT TYPES OF PIPEWORK/SIZES			
Recommended Fuse Size	5 Amp Automotive	7.5 Amp Automotive	
Current Draw	4 Amps	6 Amps	
Weight	1.5 KGS (3.3LBS)		



FP0814B



FW1214B/FW1215B

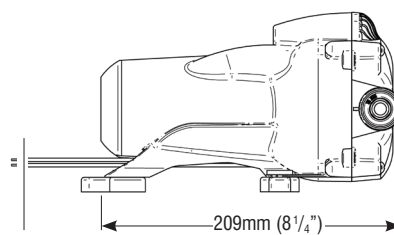

©Copyright Whale 2013 - All rights reserved.
 Whale® and Watermaster® are registered trademark of Munster Simms Engineering Limited, Bangor, Northern Ireland, trading as Whale. Whale's policy is one of continuous improvement and we reserve the right to change specifications without prior notice.
 Illustrations are for guidance purposes only.